


Hall effect Current Sensor

SCK28

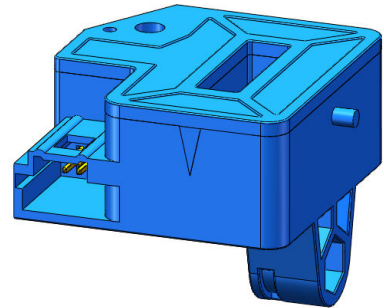

Product description

Features

- Based on Hall effect measurement principle, open loop circuit mode.
- Single-chip programmable Hall IC, compatible with automotive-specific connectors.
- Working temperature $-40^{\circ}\text{C}\sim 125^{\circ}\text{C}$.
- Easy to install, small size, does not take up space.
- Comply with UL94-V0 flame retardant rating

Performance

- It can measure DC, AC, pulse, and various irregular waveform currents of cable conductors under isolation conditions.
- Wide measurement range, fast response speed, low zero drift, low temperature drift, high accuracy and good linearity.
- Dynamic performance (di/dt and response time) is optimal when the busbar is fully filled with primary perforations.
- Strong ability to resist external electromagnetic interference (BCI, EFT, CS, CE, ESD, dv/dt, etc.).

Application

- It can be widely used in electric vehicle drivers, battery management and other products.

Implementation standards

- GB/T 7665-2005
- JB/T 7490-2007
- JB/T 25480-2010
- JB/T 9473-2020
- SJ 20792-2000

Certification



Shenzhen SoCan Technologies Co.,Ltd

SoCan is committed to continuously improving product quality, and the company reserves the right to update its products.

www.szsoacan.com

Technical Parameters

Model Parameters (25°C)	SCK28-					
	100A	300A	500A	600A	900A	1200A
Primary Current (A) I_{PN}	100A	300A	500A	600A	900A	1200A
Primary Current Max. Peak Value (A) I_{PM}	±100A	±300A	±500A	±600A	±900A	±1200A
Output voltage (V) V_{out} @± I_{PN} , $R_L=10K\Omega$	2.5V±2V					

Electrical Data

Item	Min.	Typical	Max.	Unit
Input power supply voltage range V_c (±5%) (Remark 1, Remark 2)	+4.5	+5	+5.5	V _{DC}
Current consumption I_c	-	+13	+15	mA
Withstand resistance R_{INS} @500V DC		2.5		V
Output voltage V_{out} @ I_{PN} , $R_L=10K\Omega$, $T_A=25^\circ C$	$V_{OUT} = \frac{V_{CC}}{2} + 2.0 * \frac{V_{CC}}{5} * \frac{I_P}{I_{PN}}$			V
Output internal resistance R_{OUT}	-	1	-	Ω
Load Resistance R_L (Remark 2)	10	-	-	K Ω
Accuracy X @ I_{PN} , $T_A=25^\circ C$	-	±1	-	%
Linearity ε_L @ $R_L=10K\Omega$, $T_A=25^\circ C$	-	±0.5	-	% I_{PN}
Offset voltage V_{OE} @ $T_A=25^\circ C$	-	±10	±20	mV
Hysteresis voltage V_{OM} @ $I_{PN} \rightarrow 0$	-	±10	±20	mV
Temperature Coefficient of Offset Voltage TCV_{OE}	-	±0.05	±1	mV/°C
Output voltage temperature coefficient TCV_{out}	-	±0.05	±0.1	%/°C
Response time t_D @ $0 \rightarrow I_{PN}$	-	3	5	us
Power-on delay T_{POD}	-	-	5	ms
Ambient operating temperature T_A	-40	25	125	°C
Ambient storage temperature T_s	-40	25	125	°C
Withstand voltage V_D @50Hz, 60s, 0.1mA	-	3000	-	V _{AC}
Weight m	-	60	-	g

Shenzhen SoCan Technologies Co.,Ltd


SoCan is committed to continuously improving product quality, and the company reserves the right to update its products.

www.szsocan.com

Remarks:

1. VC is less than the minimum value, which will lead to inaccurate measurement, VC is greater than the maximum value, which may cause permanent failure of the measurement device.
2. The zero bias voltage and output voltage are linearly related to V_c , so the accuracy of V_c should be ensured as much as possible when applying.

Dimensions (in mm)

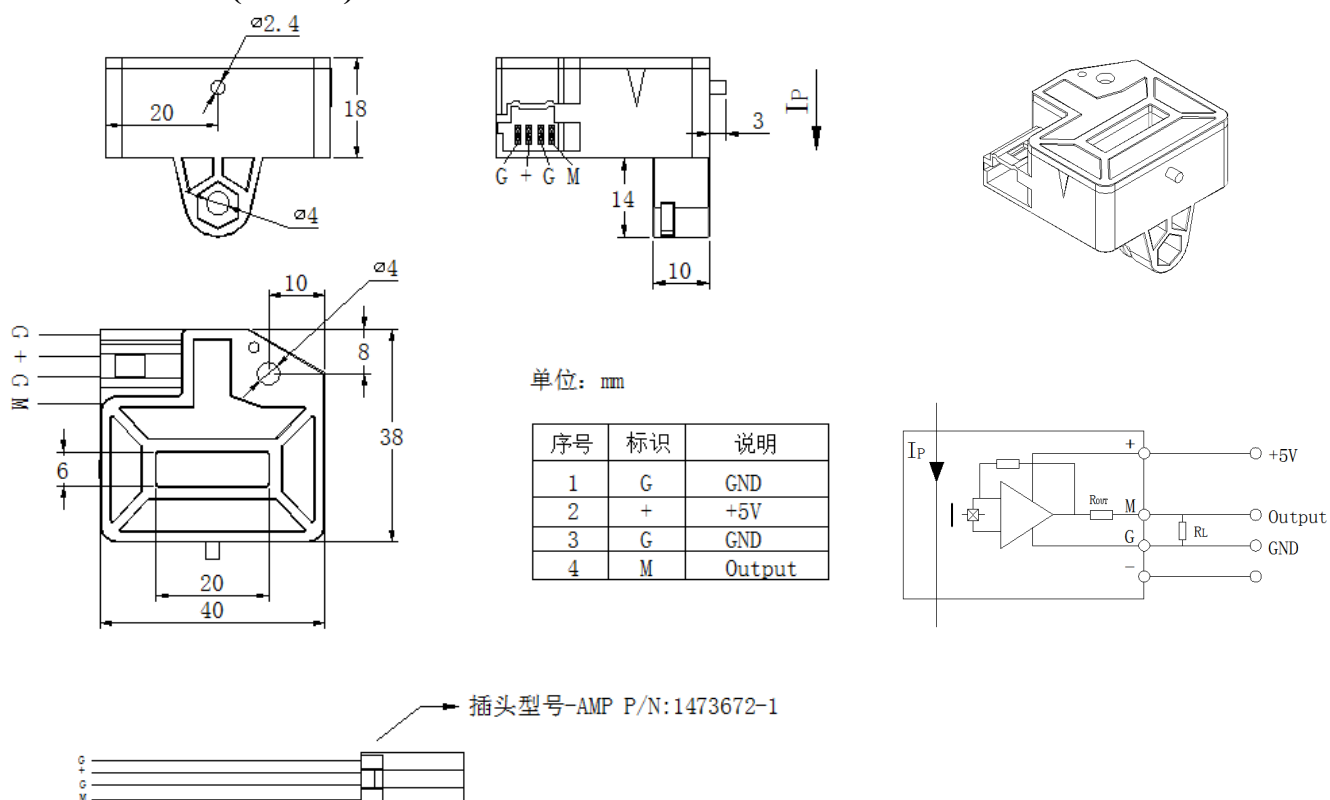

Notes:

1. Size error: $\pm 1\text{mm}$;
2. Primary aperture: $6 \times 20\text{mm}$;
3. Fastening hole: $\phi 4.5\text{mm}$;
4. Output wiring plug: AMP P/N: 1473672-1;
5. The I_P indication direction is the positive direction of the current;
6. The temperature of the primary conductor shall not exceed 105°C ;
7. Incorrect wiring may cause damage to the sensor.